

FRONT

90 mm

JVC **SP-SG2BT**
Portable Wireless Speaker

Instruction Manual




website: us.jvc.com

Notice:

* Please read Instruction Manual carefully and keep it for your records.

Package includes:


- SP-SG2BT (Bluetooth Speaker) × 1 pcs
- Strap × 1 pcs
- USB-C to USB-A Cable (12 inch / 300mm) × 1 pcs
- Instruction Manual
- Warranty Card



Specifications:

- Bluetooth Version 5.3
- Auxiliary (AUX) Input
- Output: Max. 3W/4Ω
- Battery Capacity: 600mAh
- True Wireless Stereo by 2pcs of SP-SG2BT
- SIRI Control
- Voice Support and Notification Beep
- Hands Free Calling
- Auto Off (5min. After Disconnect Bluetooth & No Operation)
- Bluetooth Working Distance: 33 ft / 10m
- Operation Temperature: 14~104°F / -10~40°C
- Size: φ2.9 × 3.8 inch / φ73.4 × 95.5mm

Basic Operations:

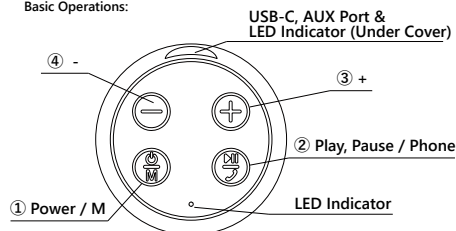

Function	Button	Operation
Power On	① Power / M	Press & Hold (2 sec.)
Power Off	① Power / M	Press & Hold (3.5 sec.)
Volume Up	③ +	Short Press
Volume Down	④ -	Short Press
Play / Pause (Bluetooth Audio)	② Play, Pause / Phone	Short Press
Mute On / Off (AUX)	② Play, Pause / Phone	Short Press
Next Song	③ +	Long Press
Previous Song	④ -	Long Press
Mode Change (Bluetooth Audio / AUX)	① Power / M	Short Press
SIRI Activate / De-Activate	② Play, Pause / Phone	Short Double Click
TWS Connect / Disconnect	① Power / M	Short Double Click
Receive / End Phone Call	② Play, Pause / Phone	Short Press
Reject Phone Call	② Play, Pause / Phone	Press & Hold (2 sec.)
Re-Boot (Recovery)	① Power / M	Press & Hold (12 sec.)

Note: *Above operation can be processed on Bluetooth devices synchronously.

Safety Instructions:

- Never disassemble SP-SG2BT in an attempt to make any repair as this could result in electrical shock, burns, or product failure.
- Use extra caution in high temperatures.
- Do not expose SP-SG2BT to direct heat or flame.
- SP-SG2BT is Not covered under Warranty when the product has metal rust, surface spoiling and any other natural oxidation.
- Damage, shock, and/or injury can occur if these Warnings are not heeded.
- SP-SG2BT may become warm while charging.
- Make sure to always turn both SP-SG2BT and power outlet off completely before unplugging it.
- Make sure SP-SG2BT has plenty of ventilation.
- Do not press the buttons too hard as it could damage SP-SG2BT.
- Only use dry cloth to keep SP-SG2BT clean from dust.
- Do not use chemicals on SP-SG2BT.
- Never try to repair SP-SG2BT yourself, take it to a Certified Technician. Trying to remove panels or repairing it yourself could lead to Electric shock. When it is not in use, make sure it is correctly Turned Off and stored in a Cool Dry place.
- Do not insert Foreign Objects into SP-SG2BT.
- Avoid dropping SP-SG2BT, as harsh impacts could Damage it.

Power On/Off and Pairing:

- Place SP-SG2BT within 30 feet for the Bluetooth-enabled device.
- Press and hold the Power button for 2.5sec. The Blue LED will flash rapidly to indicate that SP-SG2BT is in Bluetooth Pairing Mode; You will hear the Voice Support "The Bluetooth device is ready to pair".

Bluetooth Pairing:

- On your Bluetooth enabled Device (Smartphone, Tablet, Media Player) navigate to the Bluetooth setting menu, Turn On the Bluetooth feature, and search for "JVC SP-SG2BT". Type Password "0000" or "1234" if requested.
- You will hear the Voice Support "The Bluetooth Device is connected successfully", and the Blue LED Indicator is instantly ON when connected. You can start playing the music on your Devices now. The Blue LED Indicator is Flashing during playing. The Blue LED Indicator is ON during Pause Music.
- SP-SG2BT will be automatically reconnected to the last Paired Bluetooth Device when Powered On again while Bluetooth Mode.

TWS (True Wireless Stereo) Connection / Disconnection:

[Without Bluetooth Paired SP-SG2BT and Device]

- Please make sure that the Bluetooth of both SP-SG2BTs are in "The Bluetooth device is ready to pair" state when starting TWS connecting.
- Place 2pcs of SP-SG2BT together, then Power On both 2 units.
- Double-Click "Power Button" on One of SP-SG2BT, it will connect 2 units as True Wireless Stereo with Notification Beep.
- To Disconnect TWS, Double-Click Power Button again, it will disconnect.

[With Bluetooth Paired 1 of SP-SG2BT and Device]

- Operation is same as above except below.
- Please Double-Click Power Button by Bluetooth Paired SP-SG2BT when you connect TWS. However, it might take more time to connect than "Without Bluetooth Paired SP-SG2BT and Device".

BACK

62 mm

- * Please do not Bluetooth Pair each SP-SG2BT and Device separately. It will not connect TWS for all above conditions.
- * While AUX Input Mode, SP-SG2BT can not connect TWS due to No Bluetooth.

SIRI:

- Double-Click "Play, Pause / Phone" Button will Activate SIRI.
- Double-Click "Play, Pause / Phone" Button again will Deactivate SIRI.
- Google Assistant and other Voice Assistants are not Compatible.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. And any use of such marks by JVC/KENWOOD Corporation (JVC) is under license. Other trademarks and trade names are those of their respective owners.

Auxiliary (AUX) Input and Mode Change:

- When plug AUX Cable into the Product, you will hear the Voice Support "Auxiliary Input Mode" and change to AUX Mode automatically.
- SP-SG2BT can change Mode between AUX and Bluetooth while plugging in the AUX Cable.
- When unplug AUX Cable from SP-SG2BT, it will change to Bluetooth Mode automatically.
- While in AUX Input Mode, short press "Play, Pause/Phone" Button to operate Mute On / Off.
- When Mute On, press the "+" or "-" Button to operate Mute Off.

Power Control:

- SP-SG2BT will Power Off automatically if not connected and not operate buttons within 5 minutes after being Powered On.
- Low Battery Notification Beep will occur when the battery is lower than 10%.

Re-Boot (Recovery):

- Should the SP-SG2BT freeze, Press & Hold "Power/M" Button (over 11-12 sec.) until unit performs "Power Off" then "Power On" again.

Charging:

- Connect to the USB-C Charging Port located under the Silicone Cover.
- Connect the USB-A (larger end of the Cable) to your Computer's USB Port or an AC adaptor. (Not included)
- The LED Indicator will Turn RED while charging and goes off when fully charged.

WARNING FOR BATTERY

- Please do not handle the battery in the following manners. It can lead to an explosion or leakage of flammable liquids and gases.
- Dispose 1 fire, discard, crush or cut
 - Leave in extremely high temperature environment
 - Leave in extremely low pressure environment

For USA and CANADA:

This device complies with part 15 of FCC Rules and Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme à la partie 15 des règles de la FCC et aux normes des CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'appareil doit accepter tout brouillage subi même si le brouillage est susceptible de compromettre le fonctionnement.

This equipment complies with FCC/ISED radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines and RSS-102 of the ISED radio frequency (RF) Exposure rules as this equipment has very low levels of RF energy.

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles des radioélectriques (RF) de la FCC lignes directrices d'exposition et d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'ISDE puisque cet appareil a un niveau très bas d'énergie RF.

CANICES-3(B)/NMB-3(B)

This Class B digital apparatus complies with Canadian ICES-003.
(Cet appareil numérique de la Classe B conforme à la norme NMB-003 du Canada)

For USA: FCC CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limit for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from the one to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

For Customer Use:
Enter the Model No. and Serial No. (on the rating label of unit) below.
Retain this information for future reference.
Model No. _____
Serial No. _____

Supplier's Declaration of Conformity
Model Number: SP-SG2BT
Trade Name: JVC
Responsible party: JVC/KENWOOD USA Corporation
Address: 1440 Corporate Drive, Irving, TX 75038
Telephone Number: (878) 494-8879
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: 2AVB0-SPSG2BT IC: 282B-SPSG2BT



ATTENTION:
The product you have purchased is powered by a rechargeable battery that is recyclable. Please call 1-800-8-BATTERY for information on how to recycle this battery.

PRODUCT REGISTRATION FOR THE CUSTOMER IN CANADA

EN : <https://myjvckenwood.ca>
FR : <https://myjvckenwood.ca/fr>

Support
JVC IS HERE TO HELP!
TOLL FREE: 1(800)252-5722
<http://www.us.jvc.com>